


Main Features

- ▶ High clogging resistance
- ▶ Excellent CV & EU

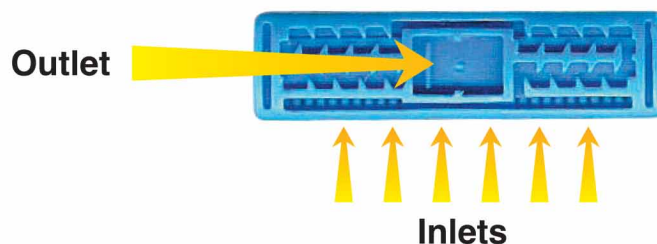

Specifications

Product	Wall Thickness	Inside Diameter	Emitter Spacing	Roll length
GreenDrip	0.20 – 0.70mm	16mm	20 – 50cm	1,000 /600/400m

* Other roll length and specifications are available to meet customers' needs.

Drip Emitter Evaluation

Pres. (bar)	Temp. (°C)	Mean (LPH)	Std.Dev.(LPH)	Cv	EU	CU
0.138	20.1	0.390	0.045	0.112	88%	91%
0.276	25.2	0.655	0.034	0.049	94%	96%
0.414	22.0	0.803	0.045	0.059	92%	96%
0.551	22.6	0.954	0.053	0.054	93%	96%
0.689	22.4	1.098	0.057	0.051	93%	96%
0.827	25.4	1.208	0.061	0.051	93%	96%
0.965	23.7	1.302	0.068	0.052	94%	96%

